

EDD96-24DC series

Whole Family: EDD-xx096 24V / 48V - 96W



Class P SELV RoHS



The driver is inside

Features

Output:	Constant Voltage
Input Range:	120VAC
PFC design:	Built-in active PFC function
Protections:	Short circuit/ Over load/ Over temperature
Heat dissipation:	Cooling by free air convection
Waterproof performance:	For dry and damp locations (US)
Design features:	1) Fine-tune output voltage can be adjusted slightly 2) Preset dimmer with on/off switch 3) 3-Way switches 4) Eliminated compatibility issues between drivers and switches
Dimming range:	0.3%-100%
Application:	Suitable for the application of LED lighting
Warranty:	5 years warranty
Others:	20KHZ PWM output with dimming curve is a gamma 2.2 curve Flicker-free


Driver+ Dimmer 2 in 1 constant voltage EDD96-XXDC series for 1CH Dimming PWM

output


Specification

Model		EDD96-24DC		EDD96-48DC	
Certificate		UL / cUL / FCC / Class P / SELV / RoHS / Reach			
Output	DC Rate Voltage	24V (24V-26V adjust by knob)		48V (48V-50V adjust by knob)	
	Voltage Tolerance	±0.5V			
	Load Regulation	≤1%		≤1%	
	Line Regulation	≤0.5%			
	Rated current	4A		2A	
	Rated power	96W		96W	
Input	Voltage Range	120VAC			
	Frequency Range	60Hz			
	Power Factor @ full load	≥0.99			
	THD(Typ.) @ full load	≤10%			
	Efficiency @ full load	91.0%		92.0%	
	AC Current (Max.)	0.9A		0.9A	
	Inrush Current (Typ.)	50A, 150us@50%Ipeak			
	Leakage current	<0.5mA			
Protection	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed			
	Over Load	≥110% Hiccup mode, recovers automatically after fault condition is removed			
	Over temperature	Shell surface temperature 100℃±10℃ shut down o/p voltage, automatically recover after cooling			
Environment	Working TEMP.	-40~+60℃ (see below derating curve)			
	Working Humidity	20 - 95%RH non-condensing			
	Storage TEM.,Humidity	-40 - +80℃,10 - 95% RH non-condensing			
	TEMP.coefficient	±0.03%/℃(0 - 50℃)			
	Vibration	10~500Hz, 2G 12min./1 cycle, period for 72 min. each along X,Y,Z axes			
Safety & EMC	Safety standards	UL8750 CAN/CSA-C22.2 No.250.13 (US)			
	Withstand voltage	I/P-O/P:1.8KVAC I/P-F/G:1.8KVAC O/P-F/G:0.5KVAC (US)			
	Isolation resistance	I/P-O/P:100M Ω / 500VDC / 25℃ / 70% RH			
	EMC Immunity	FCC/ICES do not request this test (US)			
	EMC Emission	FCC Part15 Subpart B ANSI C63.4:2014 (US)			
Others	Net Weight	0.25KG			
	Dimension	105*54*51mm / 4.134"x2.126"x1.996" (Inch)			
	Packing				
Notes	1. All parameters NOT specially mentioned are measured at 120VAC input, rated load and 25℃ of ambient temperature. 2. Tolerance: includes set up tolerance and load regulation .				


Efficiency Curve (efficiency vs output load)

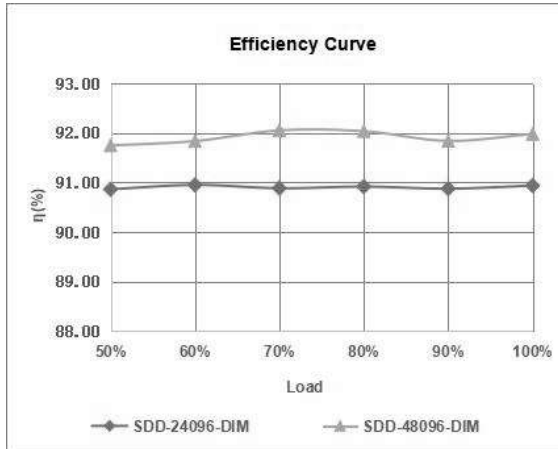

Power factor curve

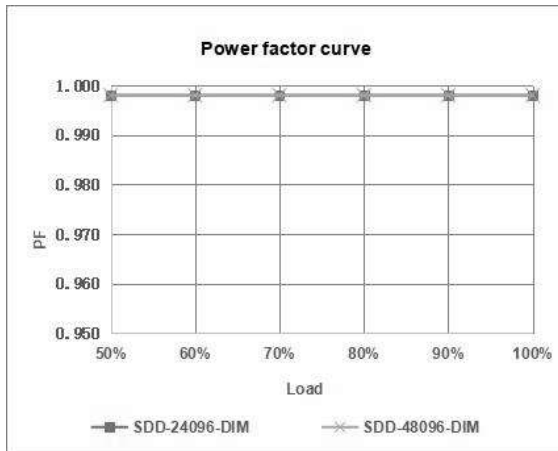



Derating Curve (Output power VS Ambient TEMP)

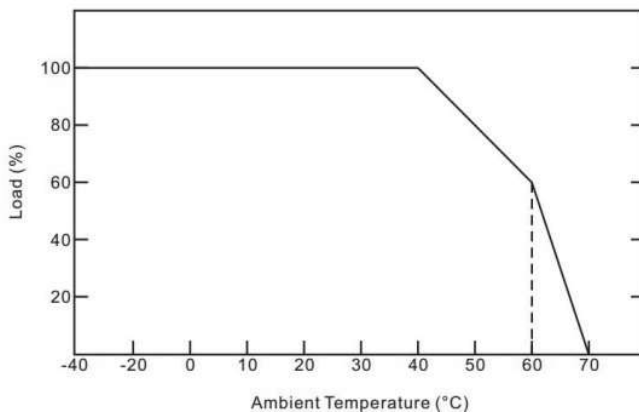

1. To extend their life, please refer to the Derating Curve and derate according to the temperature.
2. The output current of the LED driver should be selected according to the rated current of the lamp and the ambient temperature.
Normally, we recommend the power supply to reserve a certain amount of load to extend LED driver's life.

Mechanical Specification

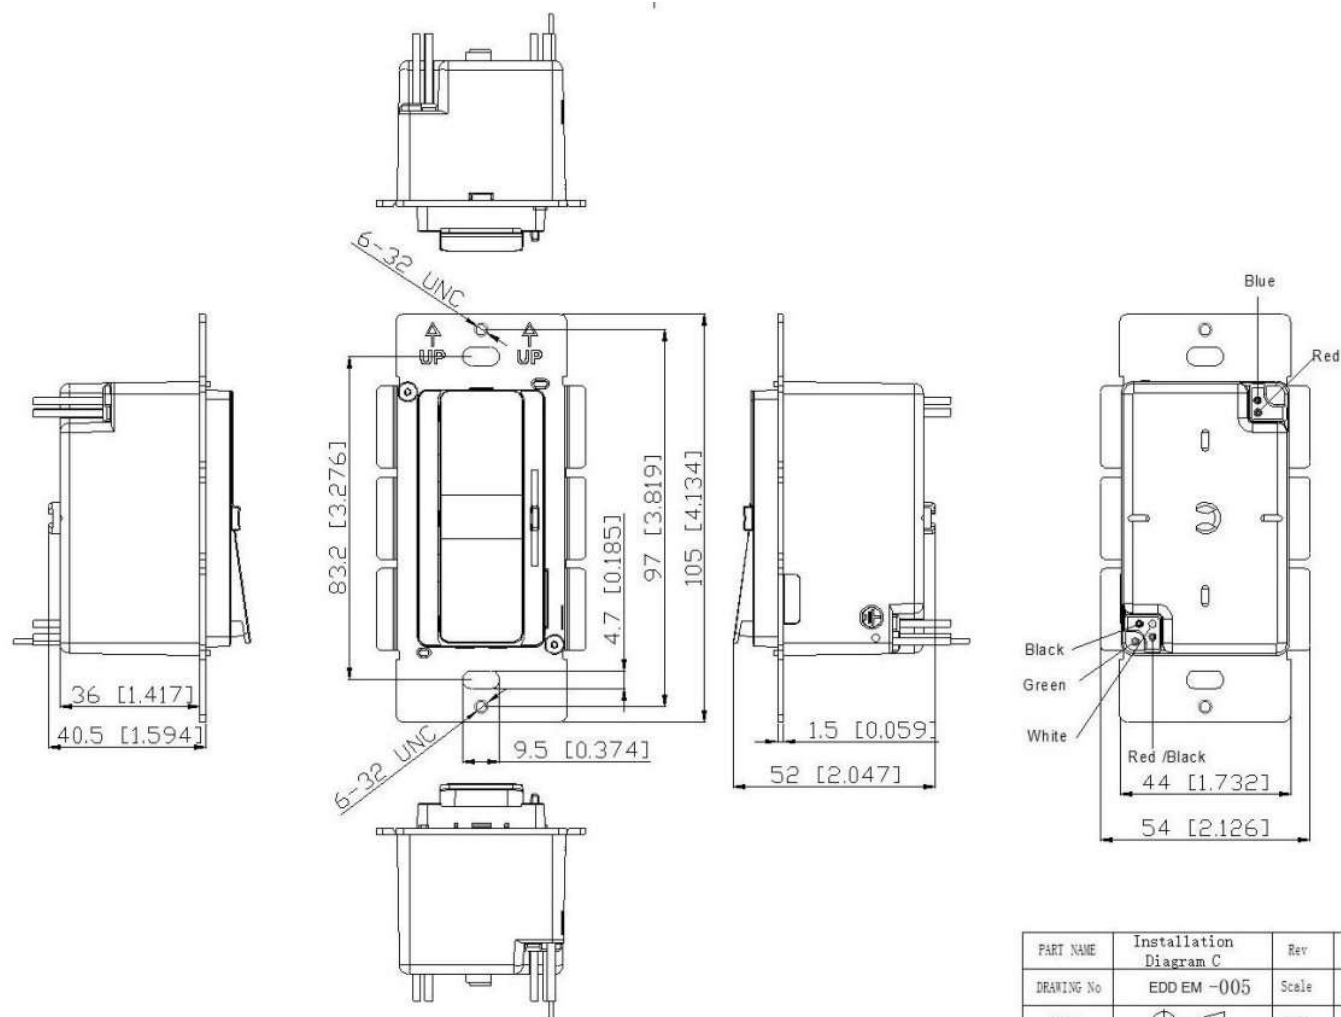

PART NAME	Installation Diagram C	Rev	A1
DRAWING No	EDD EM -005	Scale	FLT
PROJ		UNIT	MM / IN

American Wire Gauge	
Input wires	Black cable (L), Red black cable (L1), White cable (N) and Green cable (FG) (4*18AWG)
Output wires	Red cable (V+), Blue cable (V-) (2*18AWG)

Warm tips:


- Any other requests, we can customize.
- Please ensure that the connection is correct.

Dimming Operation and Connecting Diagram

① Wiring diagram of EDD96-XX model for standard dimming system



② Wiring diagram of EDD-XX model for 3-way dimming system

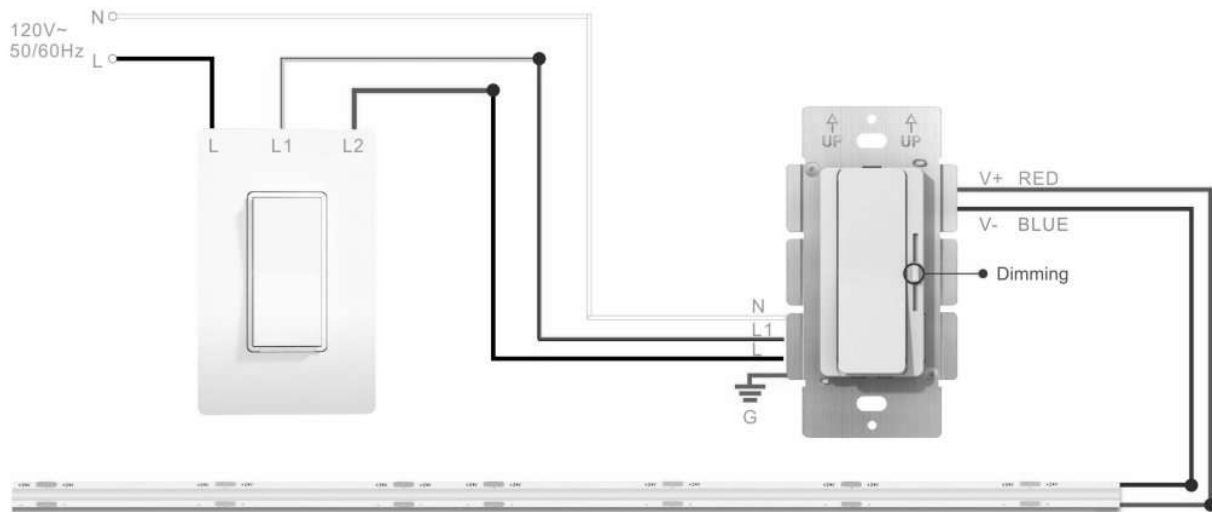

Note: Dimmer's panel is not replaceable.

Knob to adjust the voltage

Clockwise rotation of the high voltage



Have any questions, please contact with EMCOD

Please visit our website or contact us for more information! www.emcod.com

Instructions

1. This driver+dimmer 2 in 1 should be installed by qualified and professional person.
2. Please make sure the driver+dimmer 2 in 1 is installed with adequate ventilation around it to allow for heat dissipation.
3. Ensure that connection is correct to avoid LED light or driver+dimmer 2 in 1 be damaged.
4. If the driver+dimmer 2 in 1 cannot work normally, don't maintain privately.