

**Driver + Dimmer 2 in 1 Constant Voltage EDD-DC series 60W PWM output**
**EDD-DC series**

 Models      **EDD60-12DC**      **EDD60-24DC**      **EDD60-48DC**

**Class 2 Class P SELV RoHS**

**The driver is inside**
**Features**

Output:	Constant Voltage
Input Range:	120VAC
PFC design:	Built-in active PFC function
Protections:	Short circuit/ Over load/ Over temperature
Heat dissipation:	Cooling by free air convection
Waterproof performance:	For dry and damp locations (US)
Design features:	1) Fine-tune output voltage can be adjusted slightly 2) Preset dimmer with on/off switch 3) 3-Way switches 4) Eliminated compatibility issues between drivers and switches
Dimming range:	0.3%-100%
Application:	Suitable for the application of LED lighting
Warranty:	5 years warranty
Others:	16KHZ PWM output with dimming curve is a gamma 2.2 curve      Flicker-free


## Driver + Dimmer 2 in 1 Constant Voltage EDD-DC series 60W PWM output

### Specification


Model		EDD60-12DC	EDD60-24DC	EDD60-48DC
Certificate		UL / cUL / FCC / class 2 / Class P / SELV / RoHS / Reach		
Output	DC Rate Voltage	12V (12V-13.5V adjust by knob)	24V (24V-26V adjust by knob)	48V (48V-50V adjust by knob)
	Voltage Tolerance	±0.5V		
	Load Regulation	≤2%	≤1%	≤1%
	Line Regulation	≤0.5%		
	Rated current	5A	2.5A	1.25A
	Rated power	60W	60W	60W
Input	Voltage Range	120VAC		
	Frequency Range	60Hz		
	Power Factor @ full load	0.99		
	THD(Typ.) @ full load	≤10%		
	Efficiency @ full load	90.0%	91.0%	92.0%
	AC Current (Max.)	0.6A	0.6A	0.6A
	Inrush Current (Typ.)	50A, 150us@50% I <sub>peak</sub>		
	Leakage current	<0.5mA		
Protection	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed		
	Over Load	≥110% Constant current mode, recovers automatically after fault condition is removed		
	Over temperature	Shell surface temperature 100℃±10℃ shut down o/p voltage, automatically recover after cooling		
Environment	Working TEMP.	-40~+60℃ (see below derating curve)		
	Working Humidity	20 - 95%RH non-condensing		
	Storage TEM.,Humidity	-40 - +80℃, 10 - 95% RH non-condensing		
	TEMP.coefficient	±0.03%/℃ (0 - 50℃)		
	Vibration	10~500Hz, 2G 12min./1 cycle, period for 72 min. each along X,Y,Z axes		
Safety & EMC	Safety standards	UL8750 CAN/CSA-C22.2 No.250.13 (US)		
	Withstand voltage	I/P-O/P:1.8KVAC I/P-F/G:1.8KVAC O/P-F/G:0.5KVAC (US)		
	Isolation resistance	I/P-O/P:100MΩ / 500VDC / 25℃ / 70% RH		
	EMC Immunity	FCC/ICES do not request this test (US)		
	EMC Emission	FCC Part15 Subpart B ANSI C63.4:2014 (US)		
Others	Net Weight	0.25KG		
	Dimension	105*54*51mm / 4.134"x2.126"x1.996" (Inch)		
	Packing			
Notes		1. All parameters NOT specially mentioned are measured at 120VAC input, rated load and 25℃ of ambient temperature. 2. Tolerance: includes set up tolerance and load regulation .		

## Driver + Dimmer 2 in 1 Constant Voltage EDD-DC series 60W PWM output


### Efficiency Curve (efficiency vs output load)

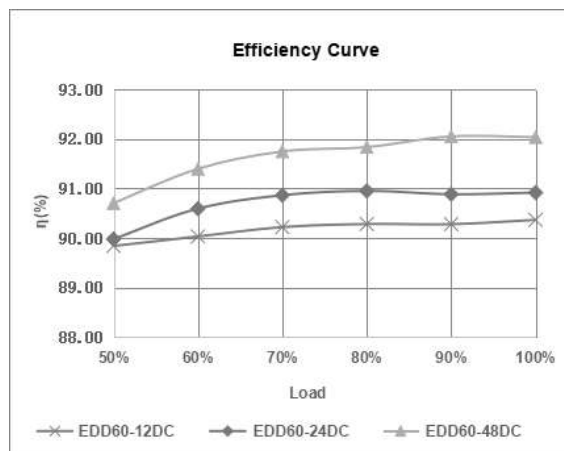

### Power factor curve

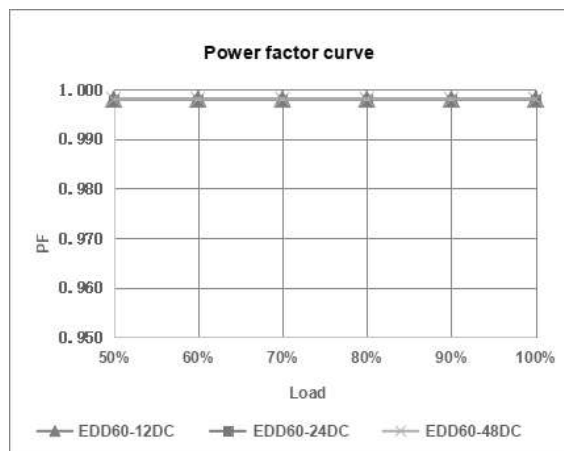


### Derating Curve (Output power VS Ambient TEMP)

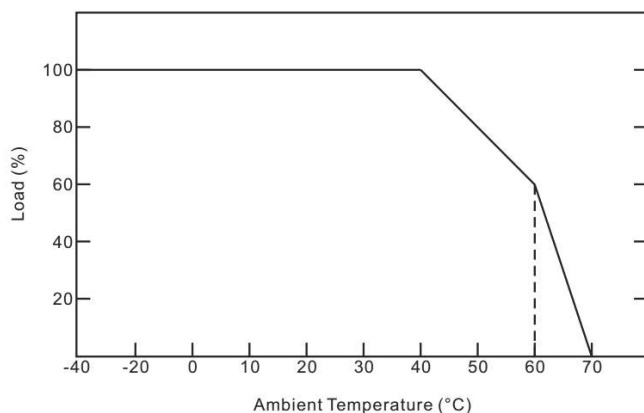

1. To extend their life, please refer to the Derating Curve and derate according to the temperature.
2. The output current of the LED driver should be selected according to the rated current of the lamp and the ambient temperature.  
Normally, we recommend the power supply to reserve a certain amount of load to extend LED driver's life.

## Driver + Dimmer 2 in 1 Constant Voltage EDD-DC series 60W PWM output

### Mechanical Specification

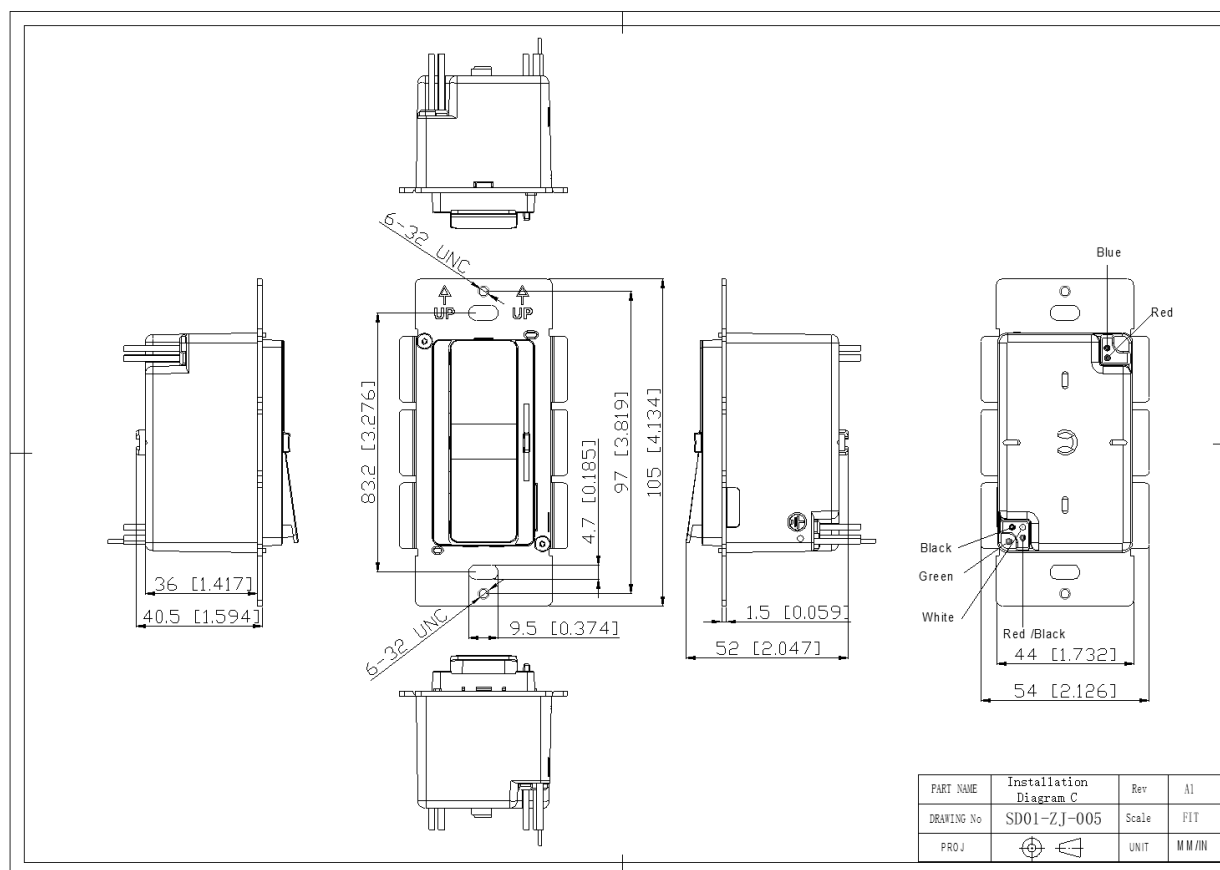

American Wire Gauge SD01	
Input wires	Black cable (L), Red black cable (L1), White cable (N) and Green cable (FG) (4*18AWG)
Output wires	Red cable (V+), Blue cable (V-) (2*18AWG)


### Warm tips:

- Any other requests, we can customize.
- Please ensure that the connection is correct.


## Driver + Dimmer 2 in 1 Constant Voltage EDD-DC series 60W PWM output

### Connecting Diagram

#### ① EDD-DC model for standard dimming system

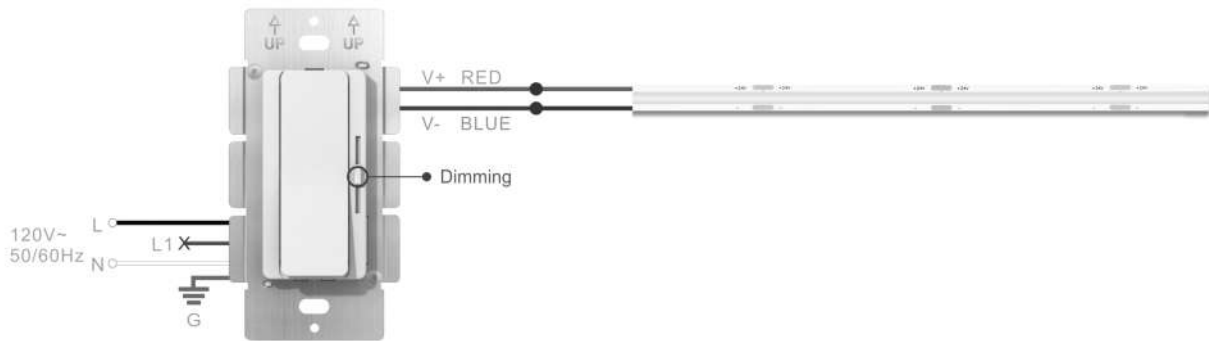

#### ② EDD-DC model for 3-way dimming system

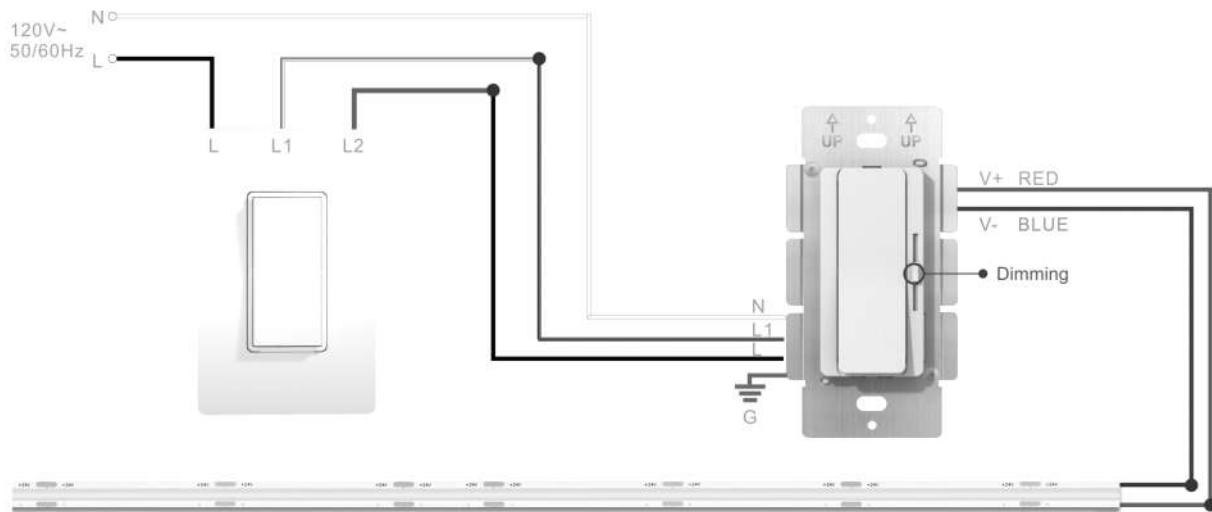

**Note: Dimmer's panel is not replaceable.**


---

**Driver + Dimmer 2 in 1 Constant Voltage EDD-DC series 60W PWM output**

---

**Knob to adjust the voltage**

Clockwise rotation of the high voltage

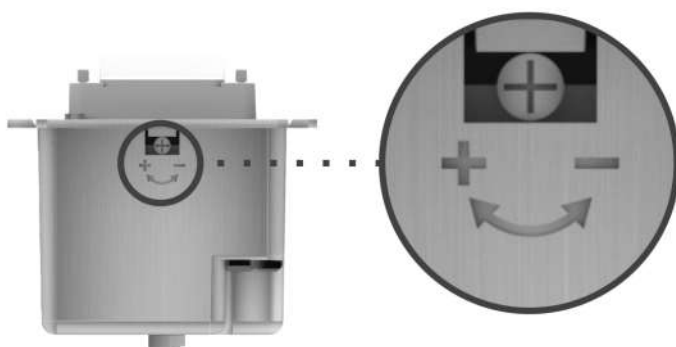**Output Volt. Adjustment**

12V output volt. : 12-13.5V

24V output volt. : 24-26V

48V output volt. : 48-50V

**Instructions**

1. This driver+dimmer 2 in 1 should be installed by qualified and professional person.
2. Please make sure the driver+dimmer 2 in 1 is installed with adequate ventilation around it to allow for heat dissipation.
3. Ensure that connection is correct to avoid LED light or driver+dimmer 2 in 1 be damaged.
4. If the driver+dimmer 2 in 1 cannot work normally, don't maintain privately.

Have any questions, please contact with EMCOD.

Please visit our website or contact us for more information! [www.emcod.com](http://www.emcod.com)