



5. APP Instruction:

There are main interfaces of "Colour Mode" "Scene Mode" "Schedule" "Music Mode" "Timer" etc to control the lights


(1) Color mode

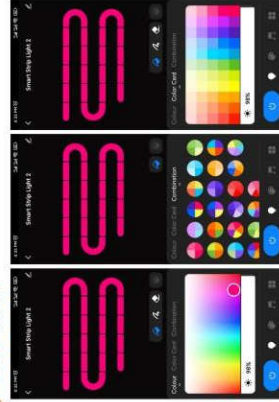


(2) Scene mode

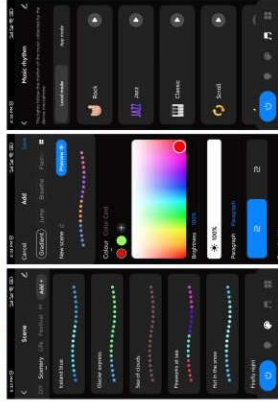

(3) Schedule and Timer


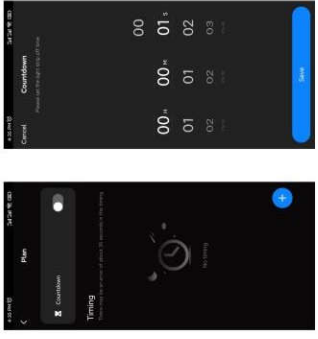


(4) Length setting

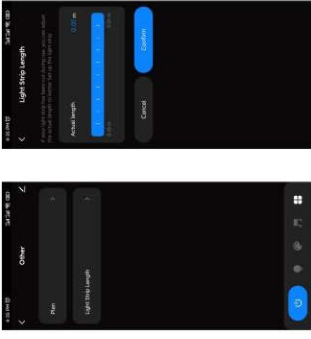

(5) Voice assistant service & FAQ

1. This controller is compatible with **Alexa**, **Google Assistant**, **Rokid**, **Trall Genie**, **Ding Dong**, **Tencent Xiaowei** and other intelligent voice devices. For detailed connection methods and instructions, please follow the corresponding device instructions. As shown by Alexa:

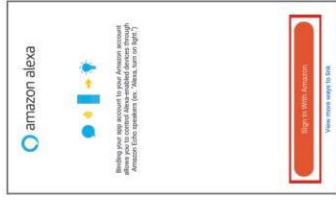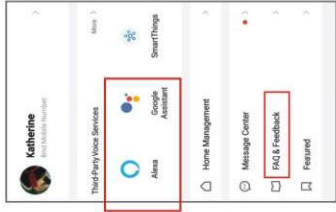

6. Cautions

- (1). This product only use on supply voltage DC5-24V, do not input on other voltage.
- (2). The lead wire shall be according to the wiring diagram of the color and label, connect correctly. Please don't reverse the power input connection of both cathode and anode.
- (3). Please do not overload, the total max output current is 6A.
- (4). If you have any questions, such as how to reset the device, router question etc, please enter "FAQ & Feedback" of "My" interface to check.

USER INSTRUCTION

Tuya WiFi Music IR 44 keys LED Controller




1. Product features:

Tuya Wifi Music IR 44 keys SPI controller is a intelligent LED controller which is compatible with APP control, Voice control and ir Remote control. It use latest Tuya wifi solution technology to ensure device's stability in LAN control and remote control. Main function are music control, 16 million colors, Scene modes, Music mode, speed adjustment, Schedule, Timer etc.


2. Technical Parameters:

- Controller**
 - Working temperature: -20~60℃
 - Input voltage: DC 5~24V
 - Max output current: 56A
 - Controller size: L60xW30xH15mm
 - Net weight: 52g(set) Gross weight: 60g(set)
- Remote control**
 - Working voltage: 3V, 1*CR2025 button cell
 - External dimension: L124mm*W54*H7mm

3. Remote & controller instruction:

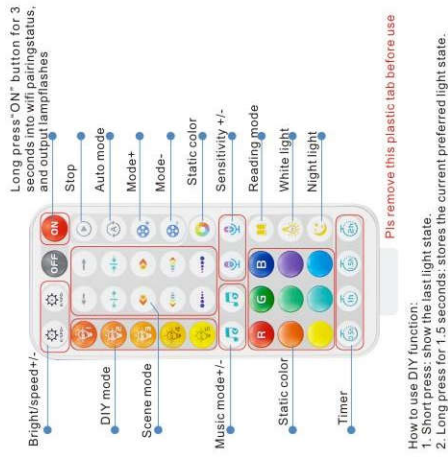

How to use DIY function:
1. Short press for the last light state.
2. Long press for 1.5 seconds: stores the current preferred light state.



- "ON/OFF" button:**
 - 1. Short press: turn on or turn off controller;
 - 2. Long press: turn on/off for 3 seconds into wifi pairing status, and output lamp flashes;
- "Music Mode" button:**
 - Short press: can switch 6 kinds music modes (corresponding the 6 music modes on remote)
- "Mode" button:**


4. Configuring App and smart device:

(1) APP download

- Scan one of the QR Code to download APP via mobile phone.
- Other methods to download APP:
iOS system: search "Tuya Smart" or "Smart life" in APP Store.
Android system: search "Tuya Smart" "Smart life" in Google play.

(2) Controller device installation

- Connecting controller and output led light first.
- Connecting input power supply, to ensure no short circuit between the cables before power on, supply voltage is DC5-24V, do not input on other voltage.

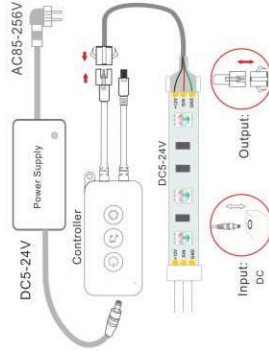

(3) Register an APP account

Open the control software APP--"Tuya Smart" or "Smart life" If you don't have an account, please click "Register" to register an account first; if you already have an account, you can use the existing account to log in directly.



(4) How to add Wifi device (Add manually way)

- Log in and enter the homepage "Home", Click "Add Device" or "+" sign in the upper right corner --> Select the "Lighting (Wi-Fi)" line item in the Add Manually column-->select the "Lighting (Wi-Fi)" go to the "Add Device" page;
- Select wifi routing network and input wifi password --> click "next"
- Long press "on/off" button on controller or remote for 5 seconds (or power on-off the controller for 3 times) can into wifi pairing status-->then output lamp flashes means setting successfully.
- Click "Quick blinking" in app-->, then app will remind "Device add successfully", now you can edit the device name, and the controller can be assigned to different places, such as: living room, master bedroom and so on.
- The WIFI Bluetooth network configuration process is as follows

