


20-4168 B

REVISIONS		
REV	DESCRIPTION	DATE
B0	CHANGED PER ECN 22-002	01/06/2022
A4	CHANGED PER ECN 18-003	04/09/2018
A3	CHANGED PER ECN 17-001	06/12/2017
A2	CHANGED IDENTIFICATION OUTPUT	06/23/2015
A1	Tc POINT LOCATION ADDED	12/18/2014
A0	RELEASE	06/22/2011

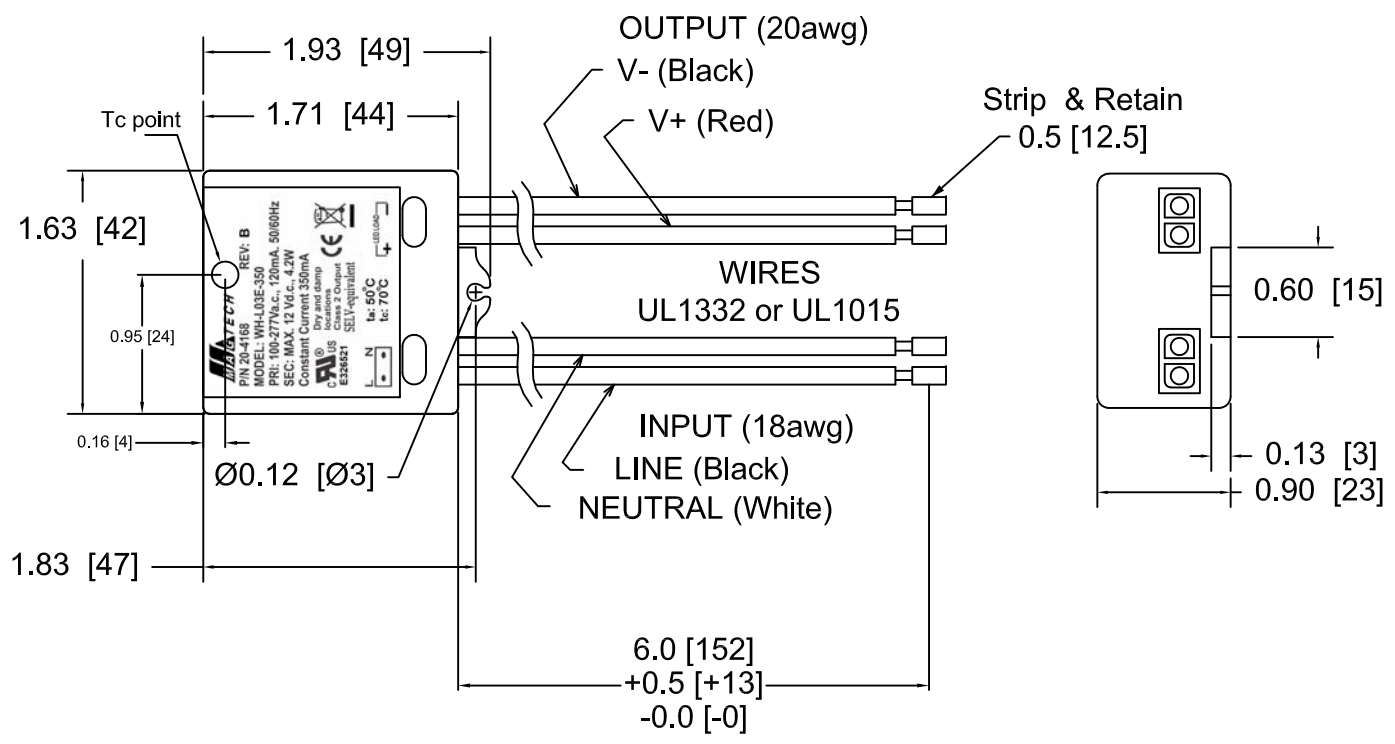

MAGTECH
P/N 20-4168 REV: B
MODEL: WH-L03E-350
PRI: 100-277Va.c., 120mA. 50/60Hz
SEC: MAX. 12 Vd.c., 4.2W
Constant Current 350mA

UL Dry and damp locations
E326521 Class 2 Output
SELV-equivalent

ta: 50°C
tc: 70°C

LED LOAD

Features:	
1	Model: WH-L03E-350
2	Input: 100~277Vac, 50/60Hz, 120mA
3	Output: CC 350mA, 14V max, 3W max.
4	LED Driver UL1310, UL8750 recognized
5	Short circuit protected
6	Over voltage protected
7	Over load protected
8	Over temperature protected
9	Ambient temperature: -20 ~ 60 Deg C
10	Max temperature at Tc: 70 Deg C
11	UL, cUL: E326521 (Vol 2)
12	CE: DOC-WH-L03E
13	RoHS Compliant

MANUFACTURED BY:				
<small>THIS ITEM IS THE PROPERTY OF MAGTECH INDUSTRIES AND CONTAINS PROPRIETARY CONFIDENTIAL AND TRADE SECRET INFORMATION. THE INFORMATION CONTAINED HEREIN MUST NOT BE USED, DISCLOSED OR REPRODUCED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN CONSENT FROM MAGTECH IND.</small>				
<small>UNLESS OTHERWISE SPECIFIED</small> <small>DIMENSIONS IN INCHES (MM)</small> <small>TOLERANCES:</small> .X DECIMALS± .05 (1.3) .XX DECIMALS± .02 (0.5) .XXX DECIMALS± .005 (0.13) ANGLES± 1° FRACTIONS± 1/16	QC:	TITLE: WH-L03E-350, 100~277VAC, 350mA CC, 3W, IN/OUT WIRES		
<small>DO NOT SCALE THIS DRAWING</small> <small>INTERPRET DRAWING PER ANSI Y14.5M</small>	APPROVAL DATE: 06/19/2017 EFFECTIVE DATE: 06/12/2017	MODEL NO. WH-L03E-350	DWG NO. M20-4168	REV. B0 SH. OF 1 1