EverLED™ by LEDdynamics

LVL.2™

Connectable LED Fixture

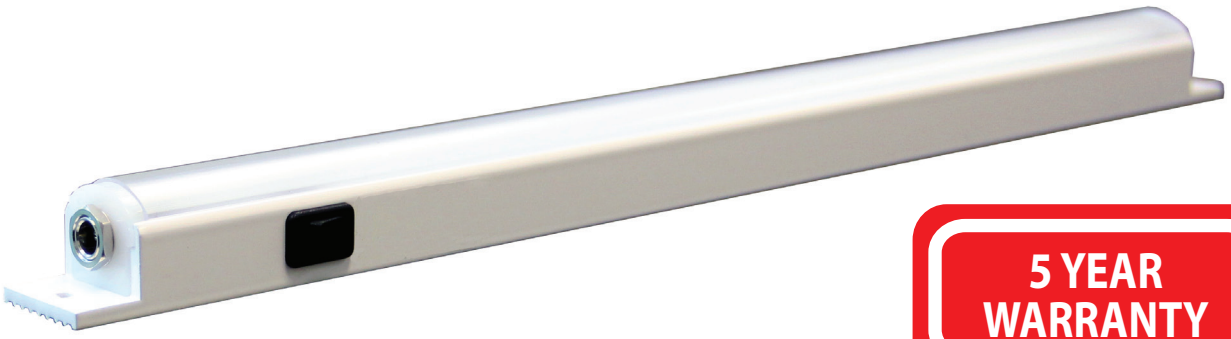

5 YEAR WARRANTY

Product Overview

The LVL.2™ is a low voltage, linear LED light fixture that delivers up to 450 lumens per foot. A small footprint and low profile allow it to be installed, hidden from view, in spatially limited locations. The traditional apperance allows its use as a direct replacement for under cabinet or under shelf lighting in both commercial and residential applications. The LVL.2 is avalable in one, two, and three foot models with standard color temperatues of 3000K, 4000K, and 5000K. The fixture is provided with an on/off switch and integrated mounting tabs.

Electrical Connections

The LVL.2 fixtures have a standard 2.5mm barrel connector on each end allowing the user to provide power to a single unit or to connect two or more units together to form a string up to 17 feet of fixture length total.

Jumper cables

Part Number	Length
EAJP06C	6″
EAJP08C	8″
EAJP12C	12″
EAJP24C	24″

Wall-mount power supplies

Part Number	Output	Length of Fixture(s)
EAPS1524C-A	15W	1 - 3 ft
EAPS4024C-A	40W	1 - 9 ft
EAPS9624C-A	96W	1 - 17 ft

Typical Applications

- Cove Lighting
- Architectural Lighting
- General Illumination
- Accent Lighting
- Display Lighting
- RV/Automotive Systems
- Wall Wash & Bias Lighting
- Cabinet & Display Case Lighting
- Solar Powered Systems

RoHS Compliant 2002/95/EC

Pb

MADE IN U. S. A.

©2015 EverLED, A Division of LEDdynamics, Inc. www.EverLED.com.
Specifications subject to change without notice. Feb, 2015 - Rev 2.5

LEDdynamics, Inc.
802.728.4533 P
802.728.3800 F
sales@EverLED.com
www.EverLED.com

Made in the USA

LEDdynamics™ what a bright idea

Part Number Identification Table

Table 1
Product Selection

Part Number	Color	CRI	Full Length	Illuminated Length	Power Budget
EL2S12750	5000K White	70 typ	13″	12″	4.5W
EL2S24750	5000K White	70 typ	25″	24″	4.5W
EL2S36750	5000K White	70 typ	37″	36″	4.5W
EL2S12740	4000K White	80 min	13″	12″	9W
EL2S24740	4000K White	80 min	25″	24″	9W
EL2S36740	4000K White	80 min	37″	36″	9W
EL2S12830	3000K White	80 min	13″	12″	13.5W
EL2S24830	3000K White	80 min	25″	24″	13.5W
EL2S36830	3000K White	80 min	37″	36″	13.5W

Notes for Table 1:
1. Custom units available upon request, restrictions apply. Contact EverLED for additional details.

Physical Dimensions

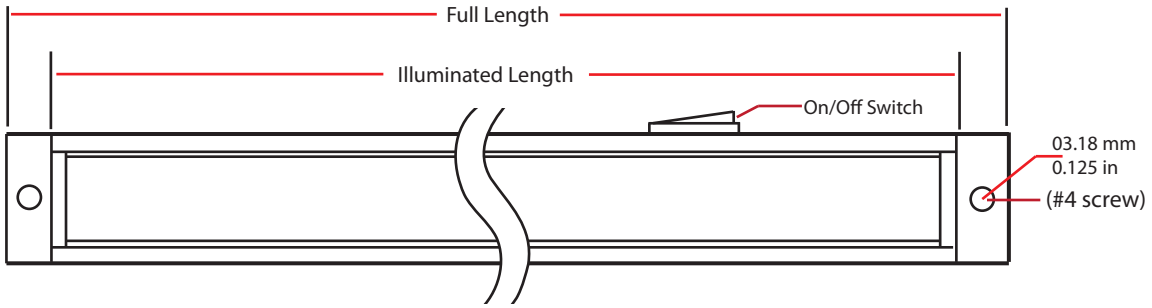

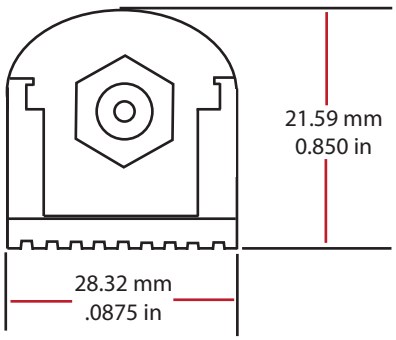

©2015 EverLED, A Division of LEDdynamics, Inc. www.EverLED.com.
Specifications subject to change without notice. Feb, 2015 - Rev 2.5

LEDdynamics, Inc.
802.728.4533 P
802.728.3800 F
sales@EverLED.com
www.EverLED.com

Made in the USA

LEDdynamics™ what a bright idea