

6" E-PRO DOWNLIGHT


Economy and performance combined

6" E-PRO DOWNLIGHT

Save 85% in energy costs (9.7 watt LED versus 65 watt 65BR40) by using the E-PRO Series 6" downlight instead of conventional incandescent. Also reduce heat and frequent lamp replacements.

FEATURES

- Dimmable with most standard incandescent dimmers
- Save in running costs over incandescent and eliminate frequent lamp replacements
- Easy to install – just remove existing lamp and trim, screw socket adaptor into existing 120-volt 6" recessed can, snap mating power connectors together and secure LED Downlight with built-in torsion springs (attached) or torsion clips (included, not attached)
- Low maintenance LEDs last 35,000 hours (average life)
- 2700K*, 3000K, and 4000K LED light with high color rendering produce attractive general lighting for residential and commercial applications
- Highly efficient – high output EP6H and standard output EP6 produce 77 lumens/watt
- New interchangeable adaptor design offers Title 24 compliance (see AL-GU24 adaptor below)
- Suitable for damp locations
- Five year warranty

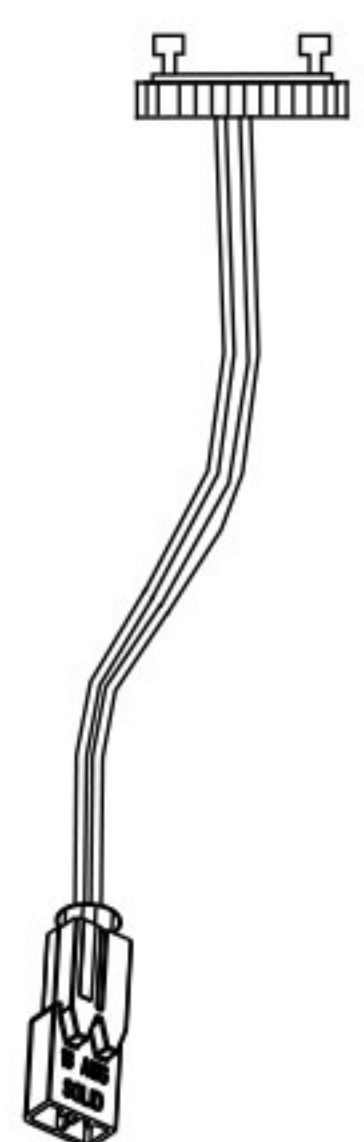

AL-GU24 (optional)
8" GU24 connector with molex connection. Required for Title 24 compliance. Replaces screw-in socket connection.




Dark Bronze



Brushed Steel



White

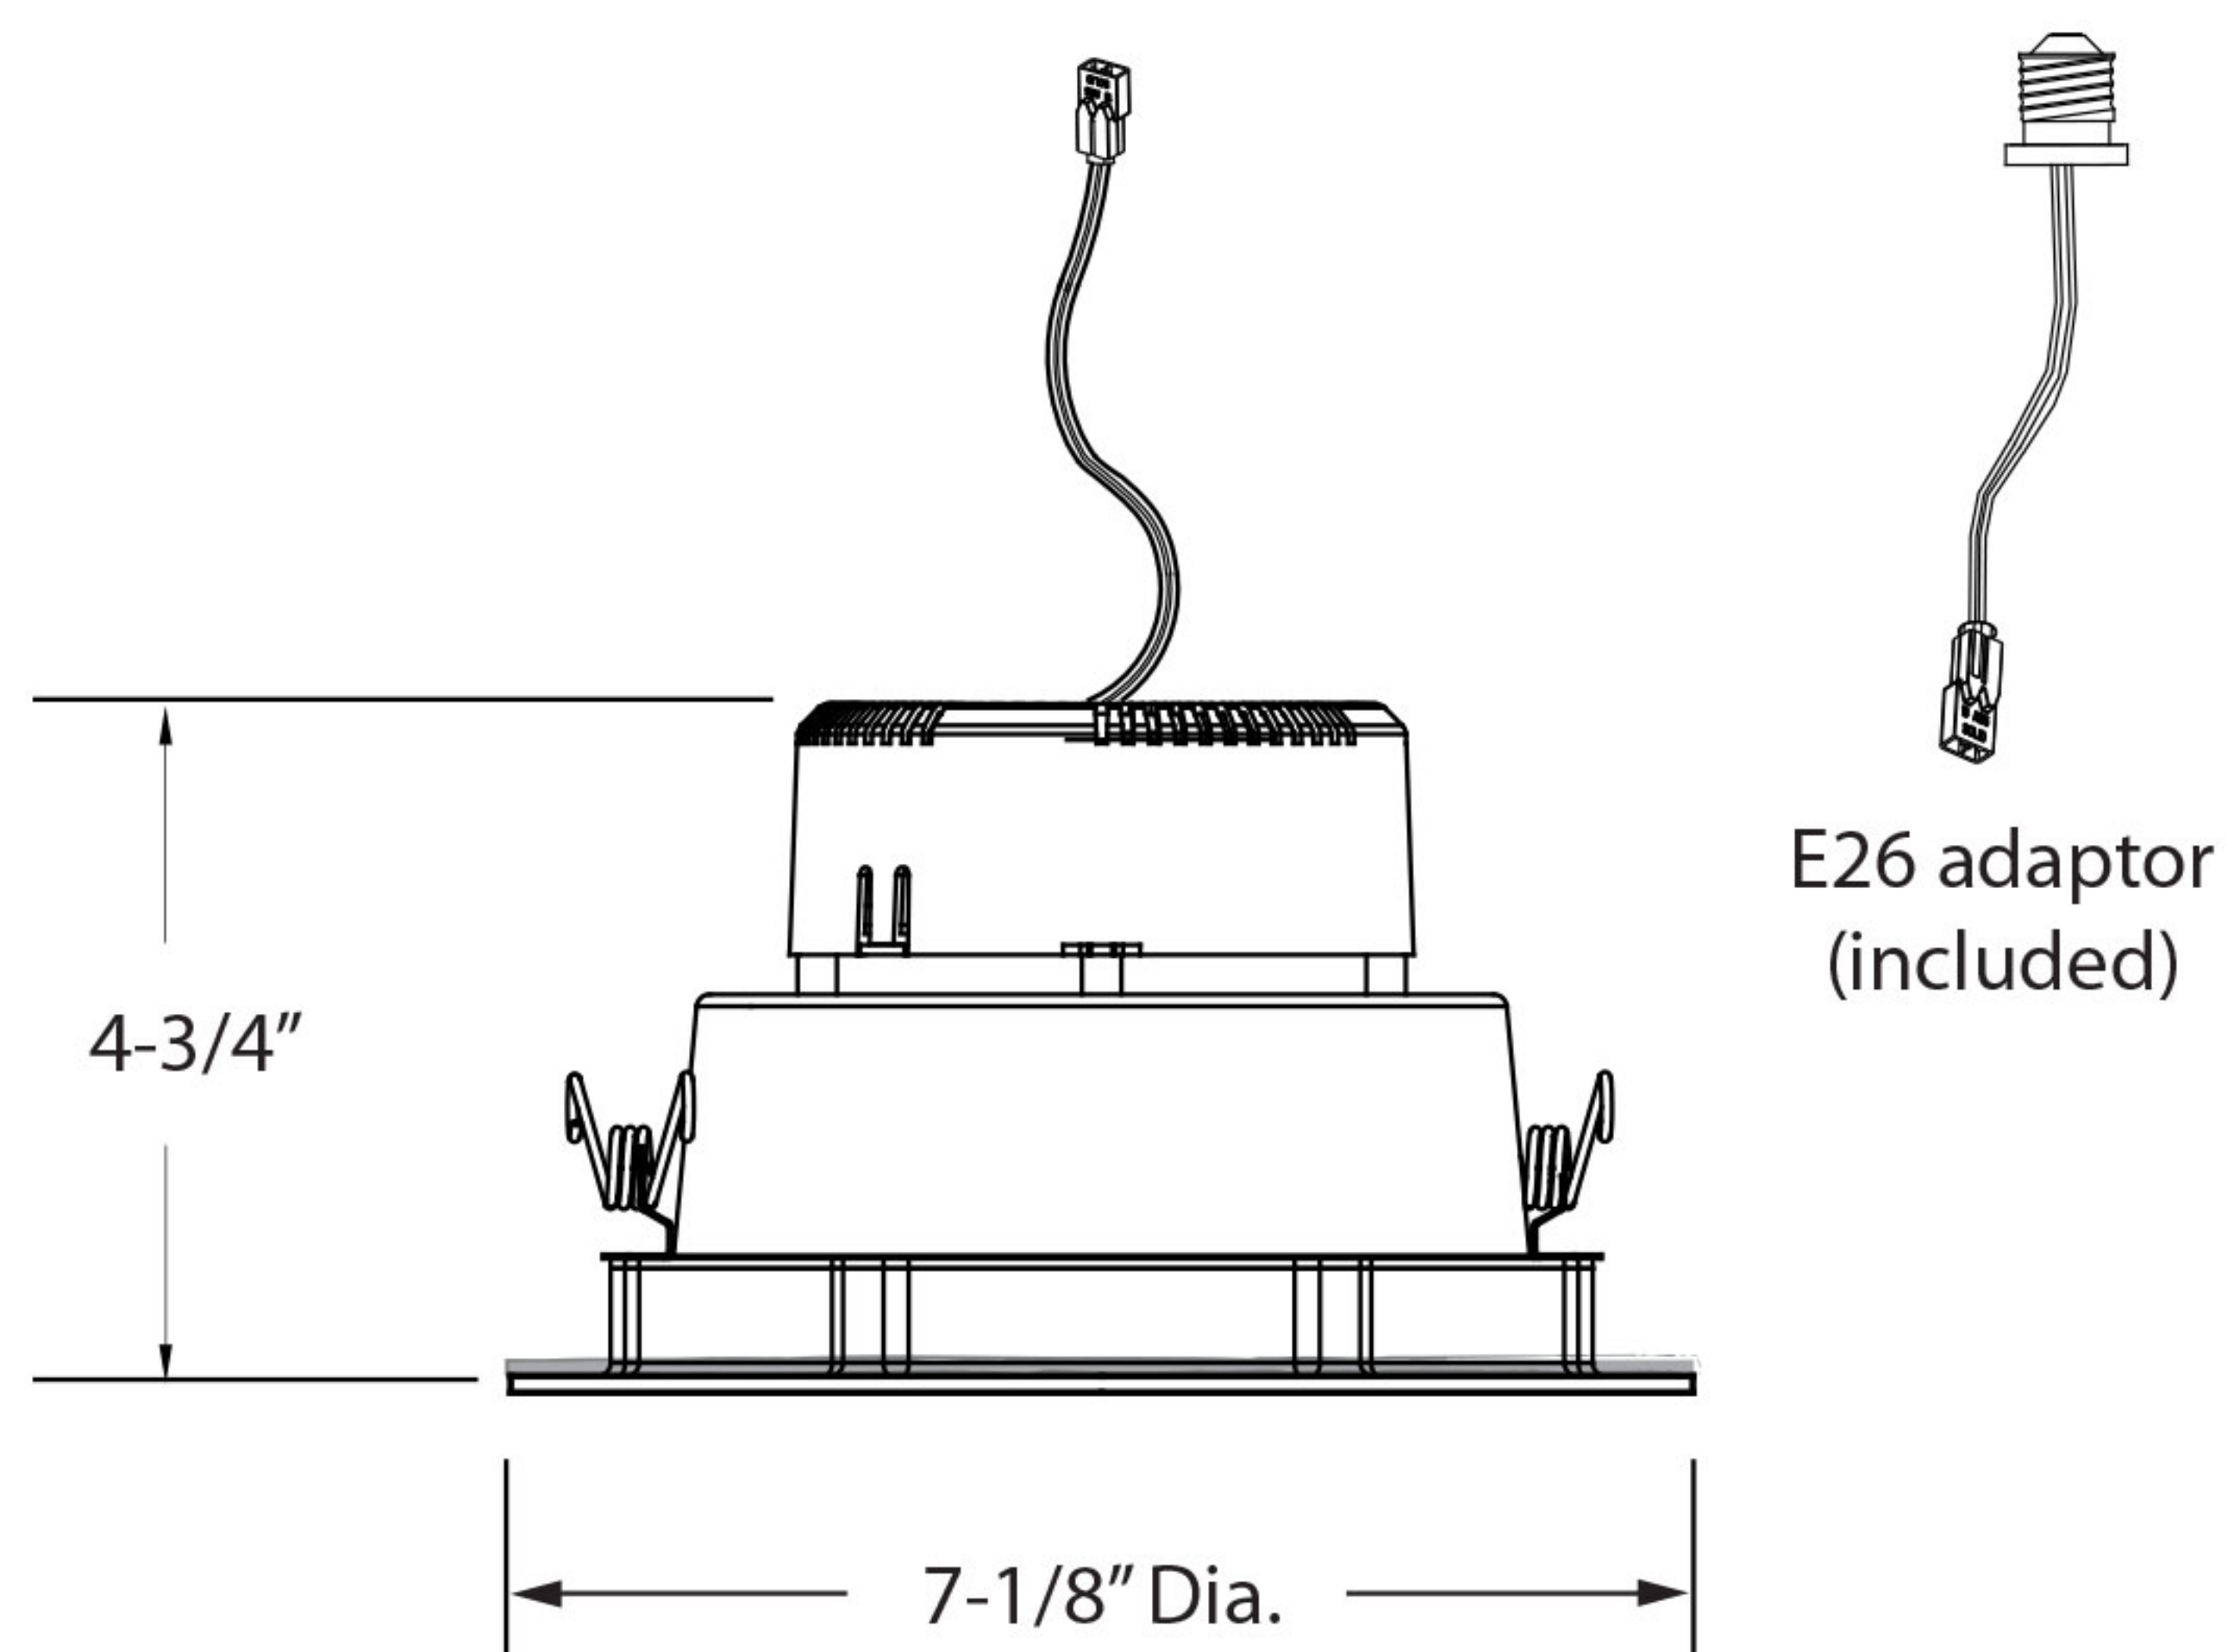

DOWNLIGHTS

LS-

EP6 (745 lumens)

EP6H (1000 lumens)

27 = 2700K

30 = 3000K

40 = 4000K



DB = Dark Bronze

BS = Brushed Steel



WH = White

*EP6H is available in 3000K and 4000K, white finish only.

HIGH OUTPUT 6" E-PRO – 3000K

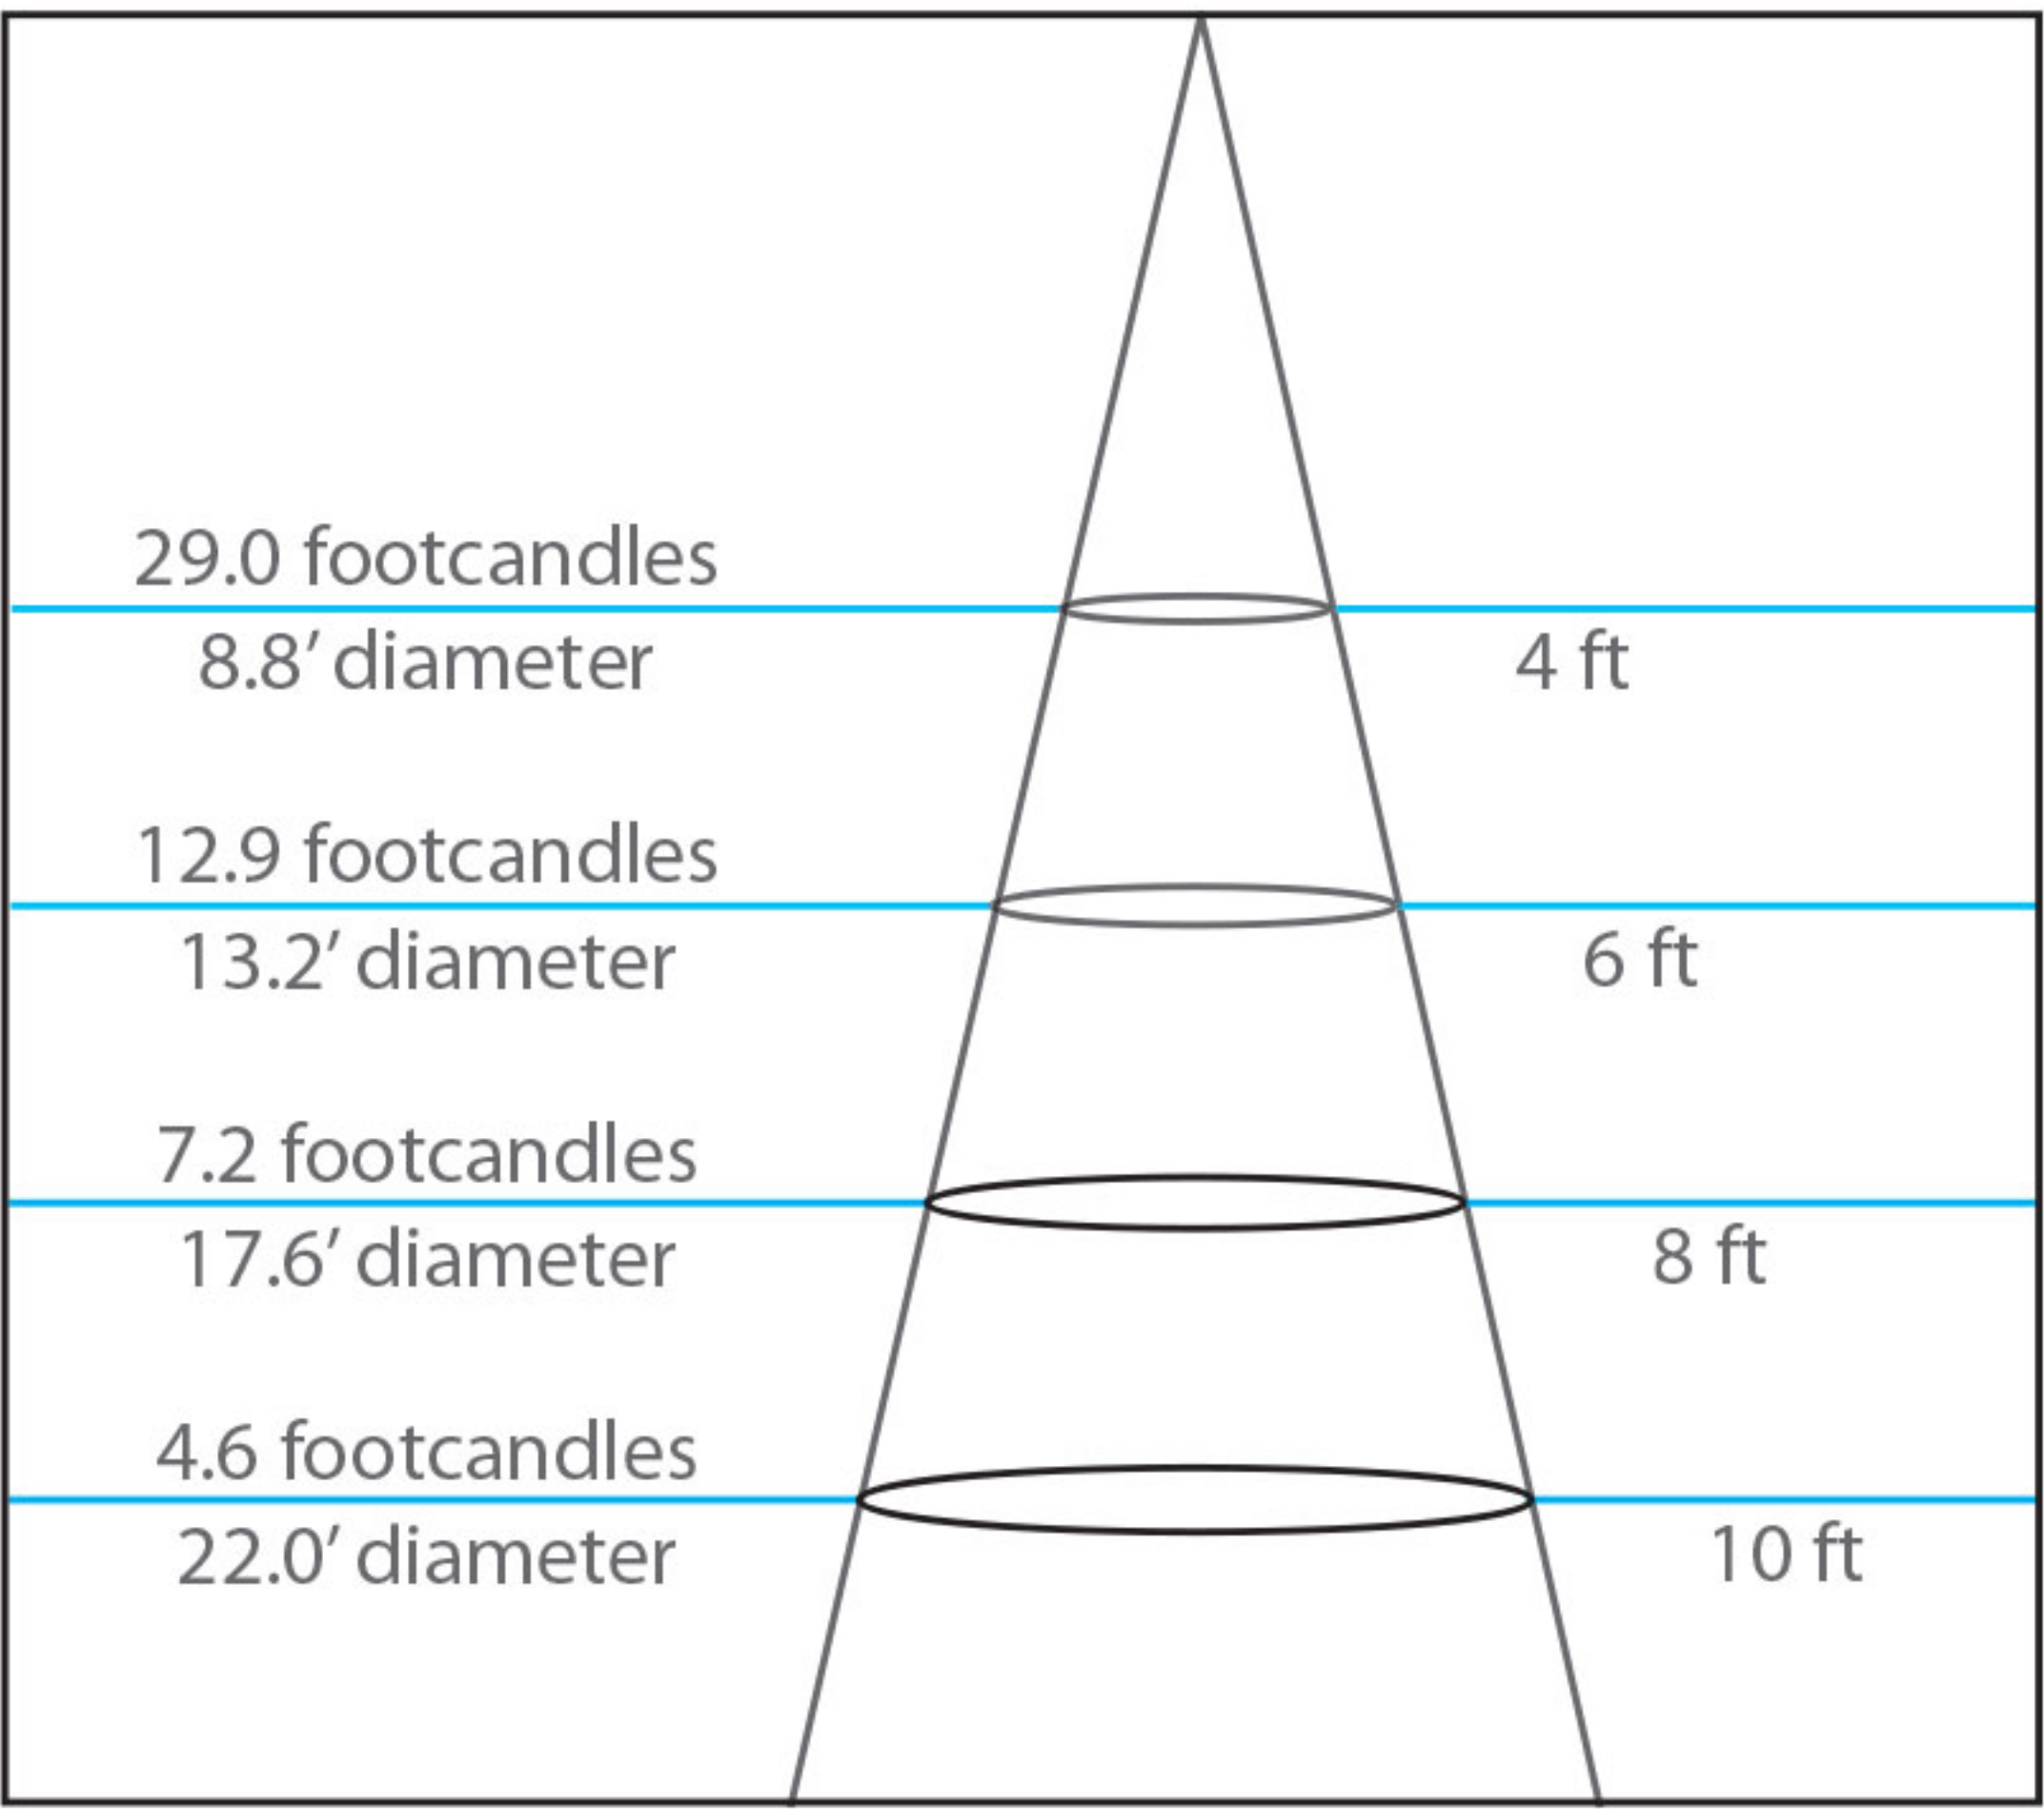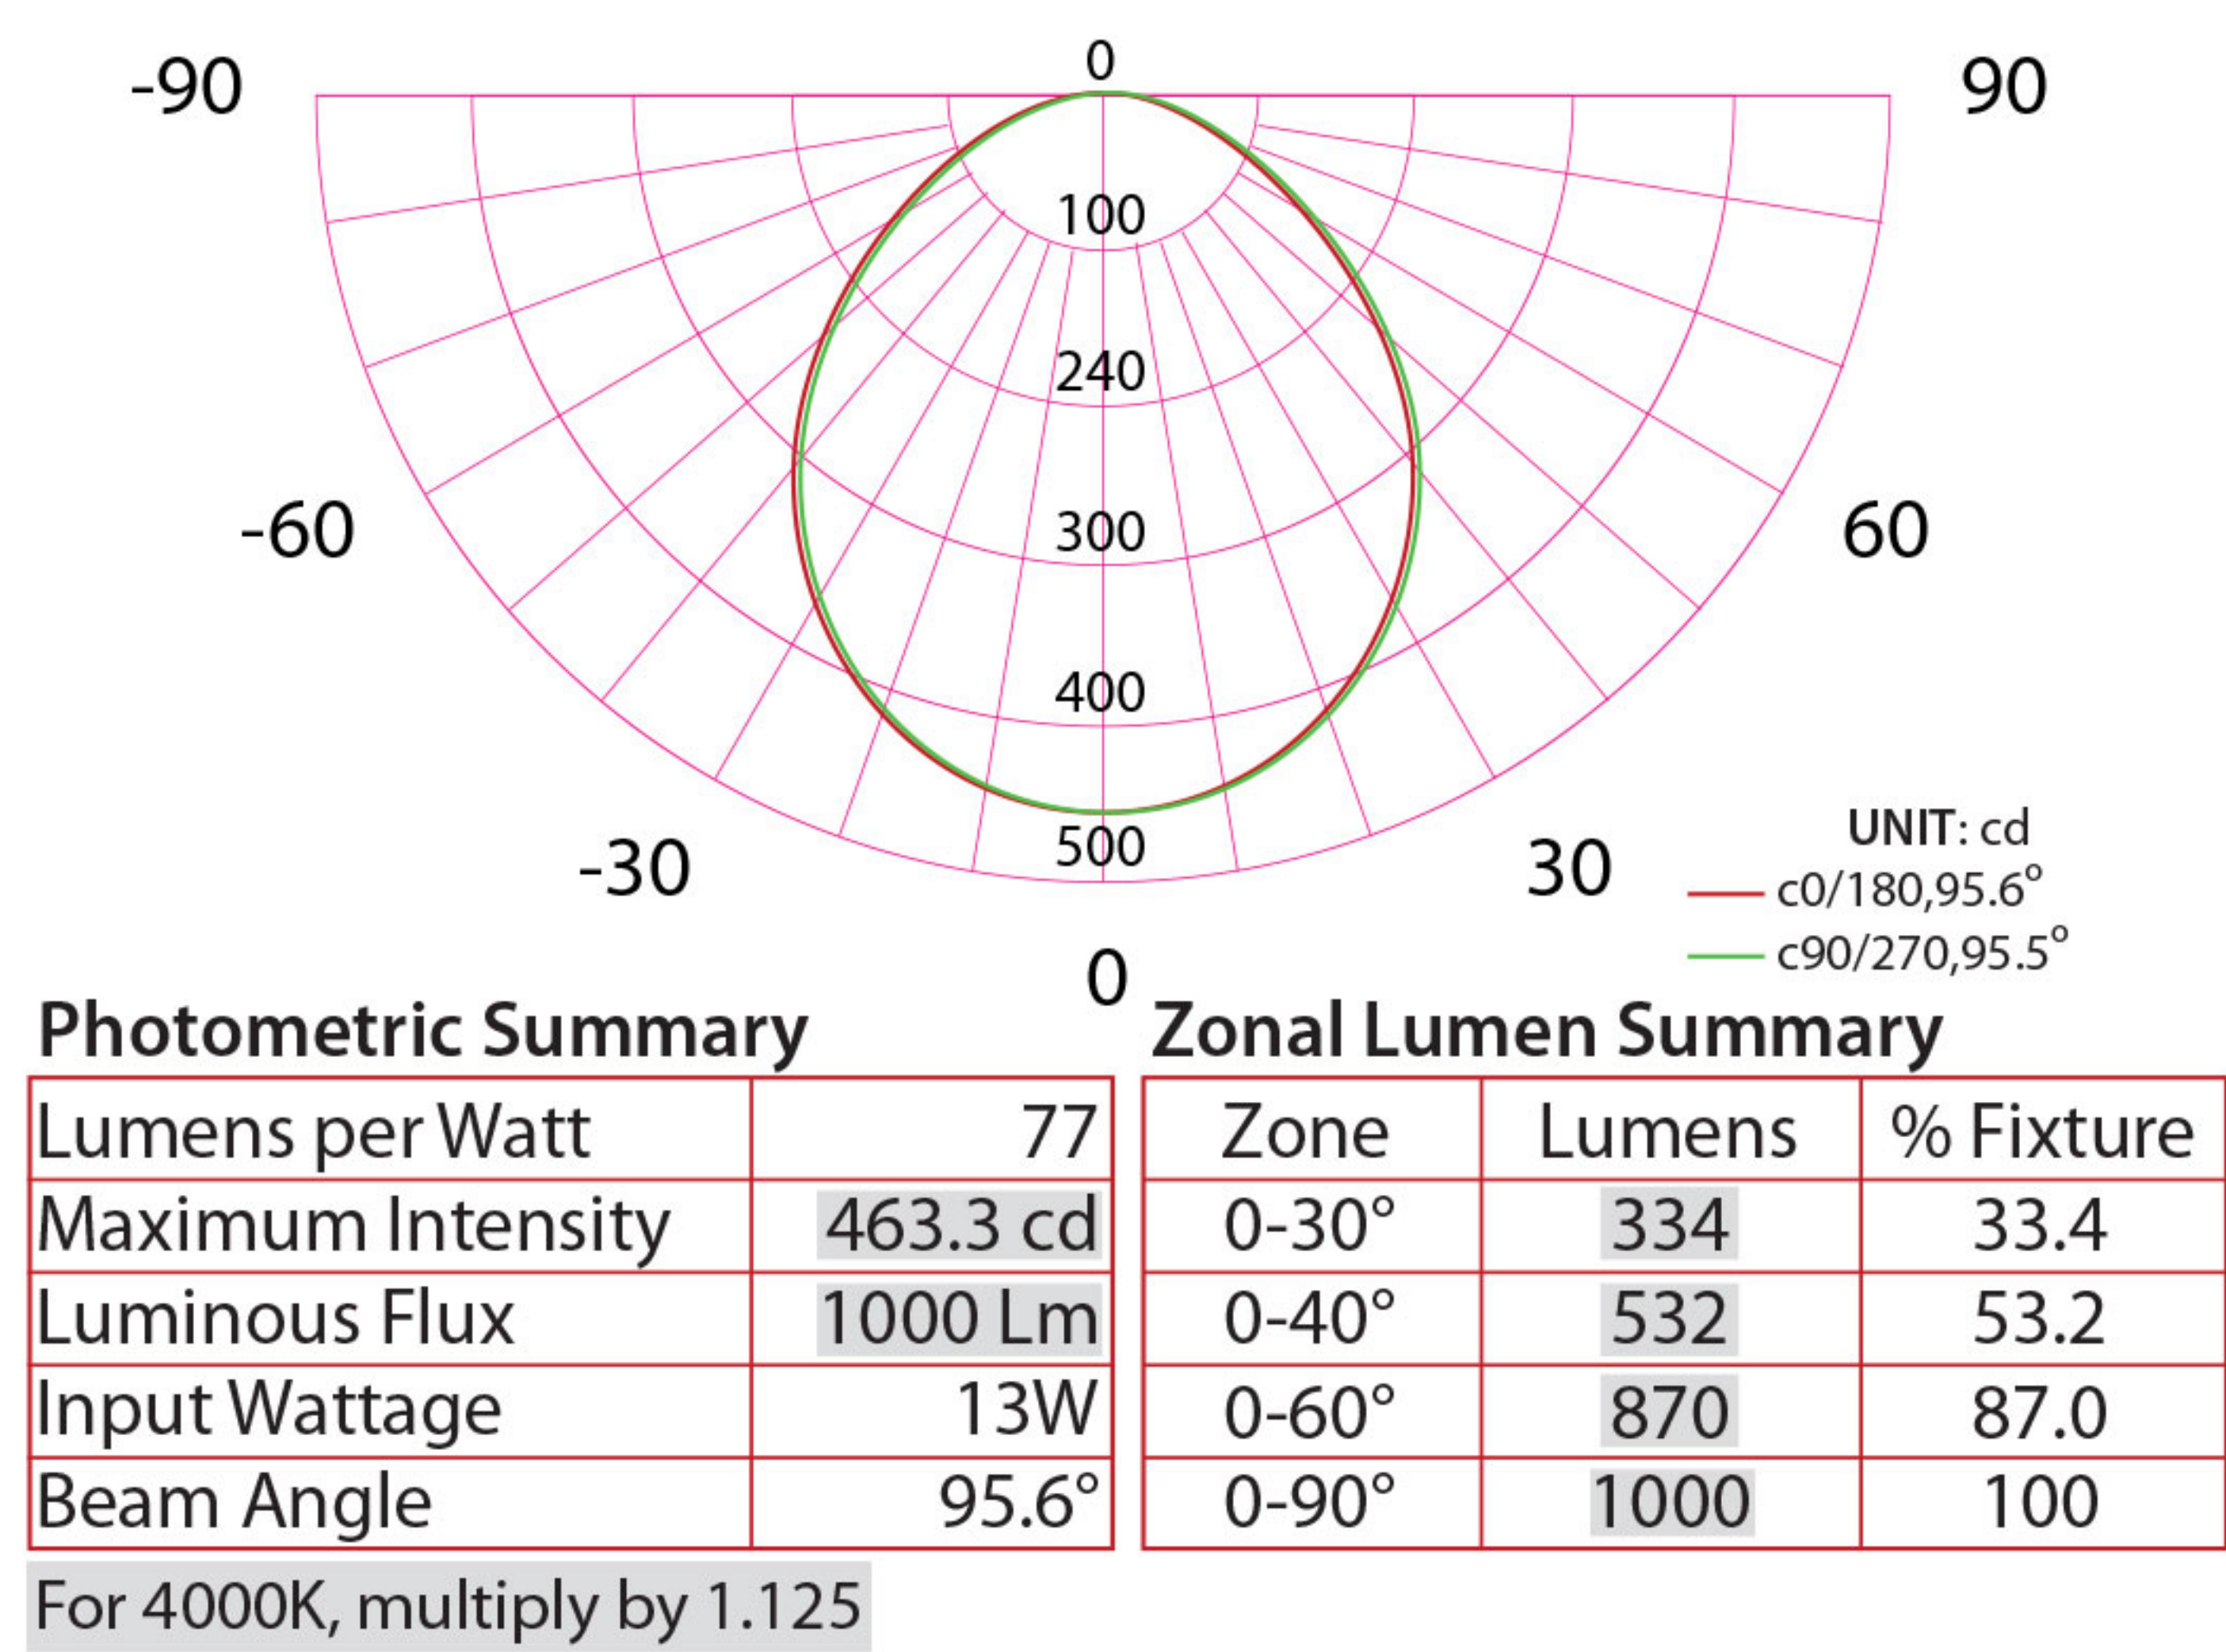

6" E-PRO – 3000K

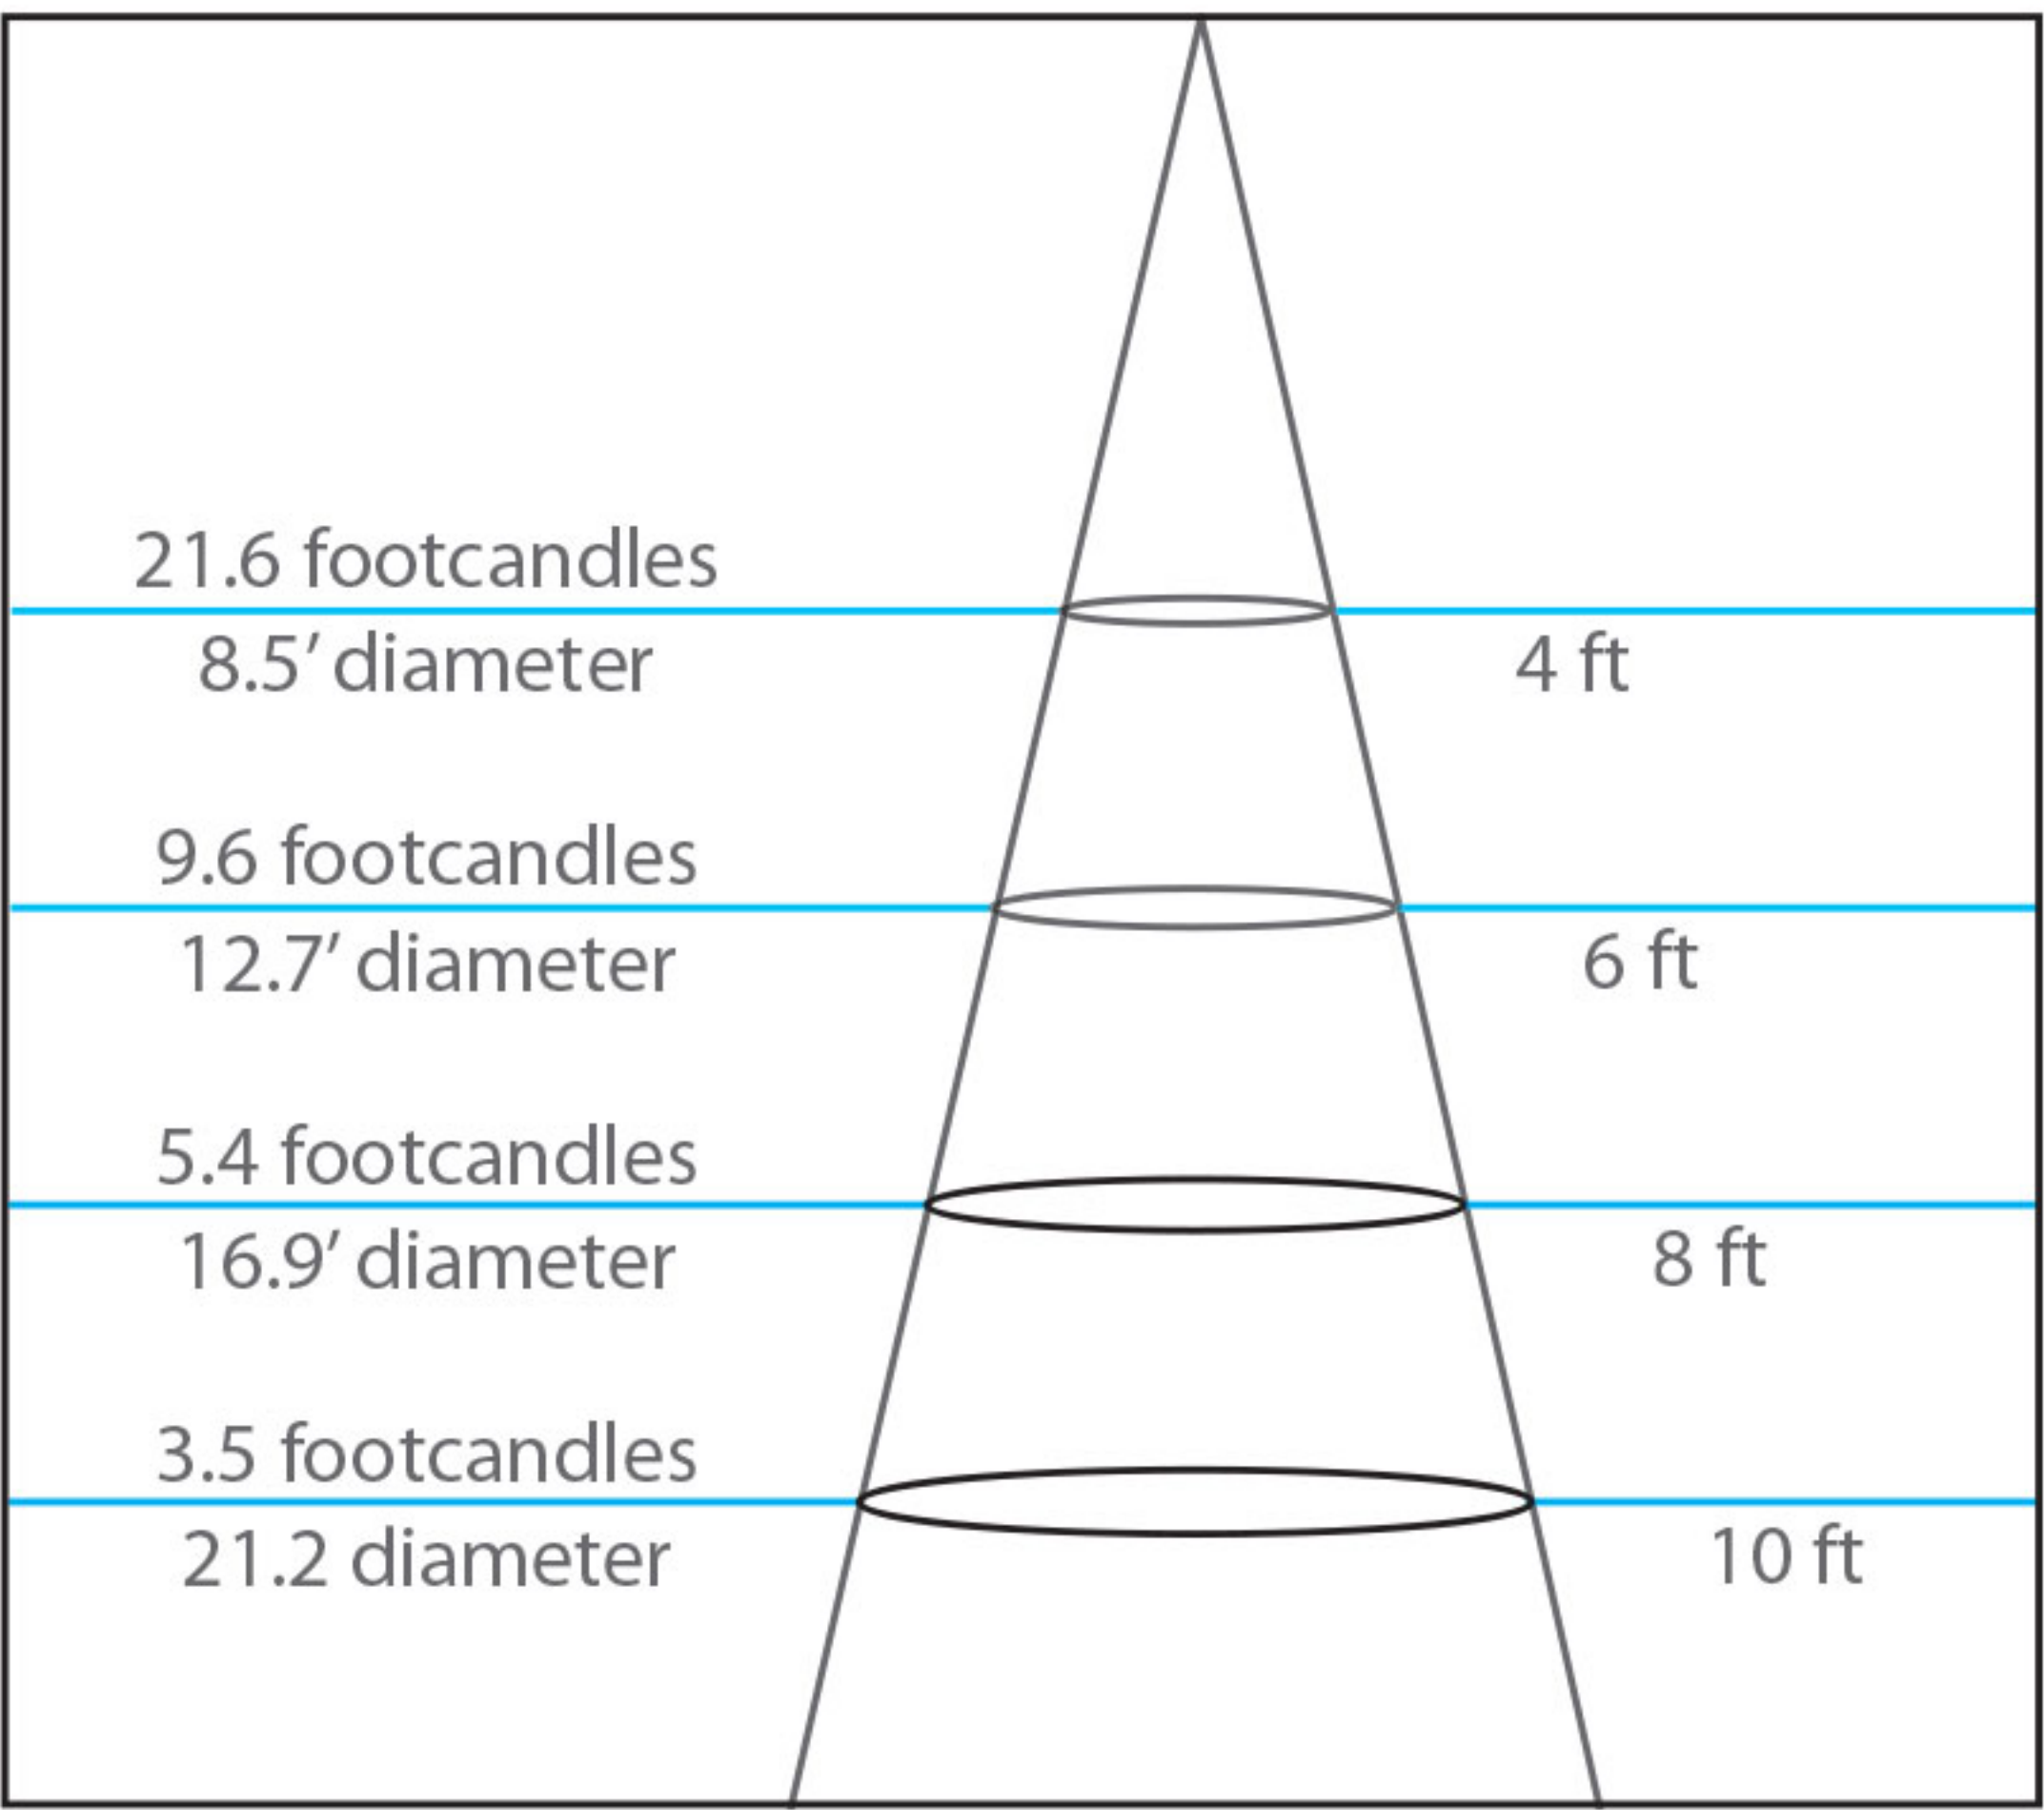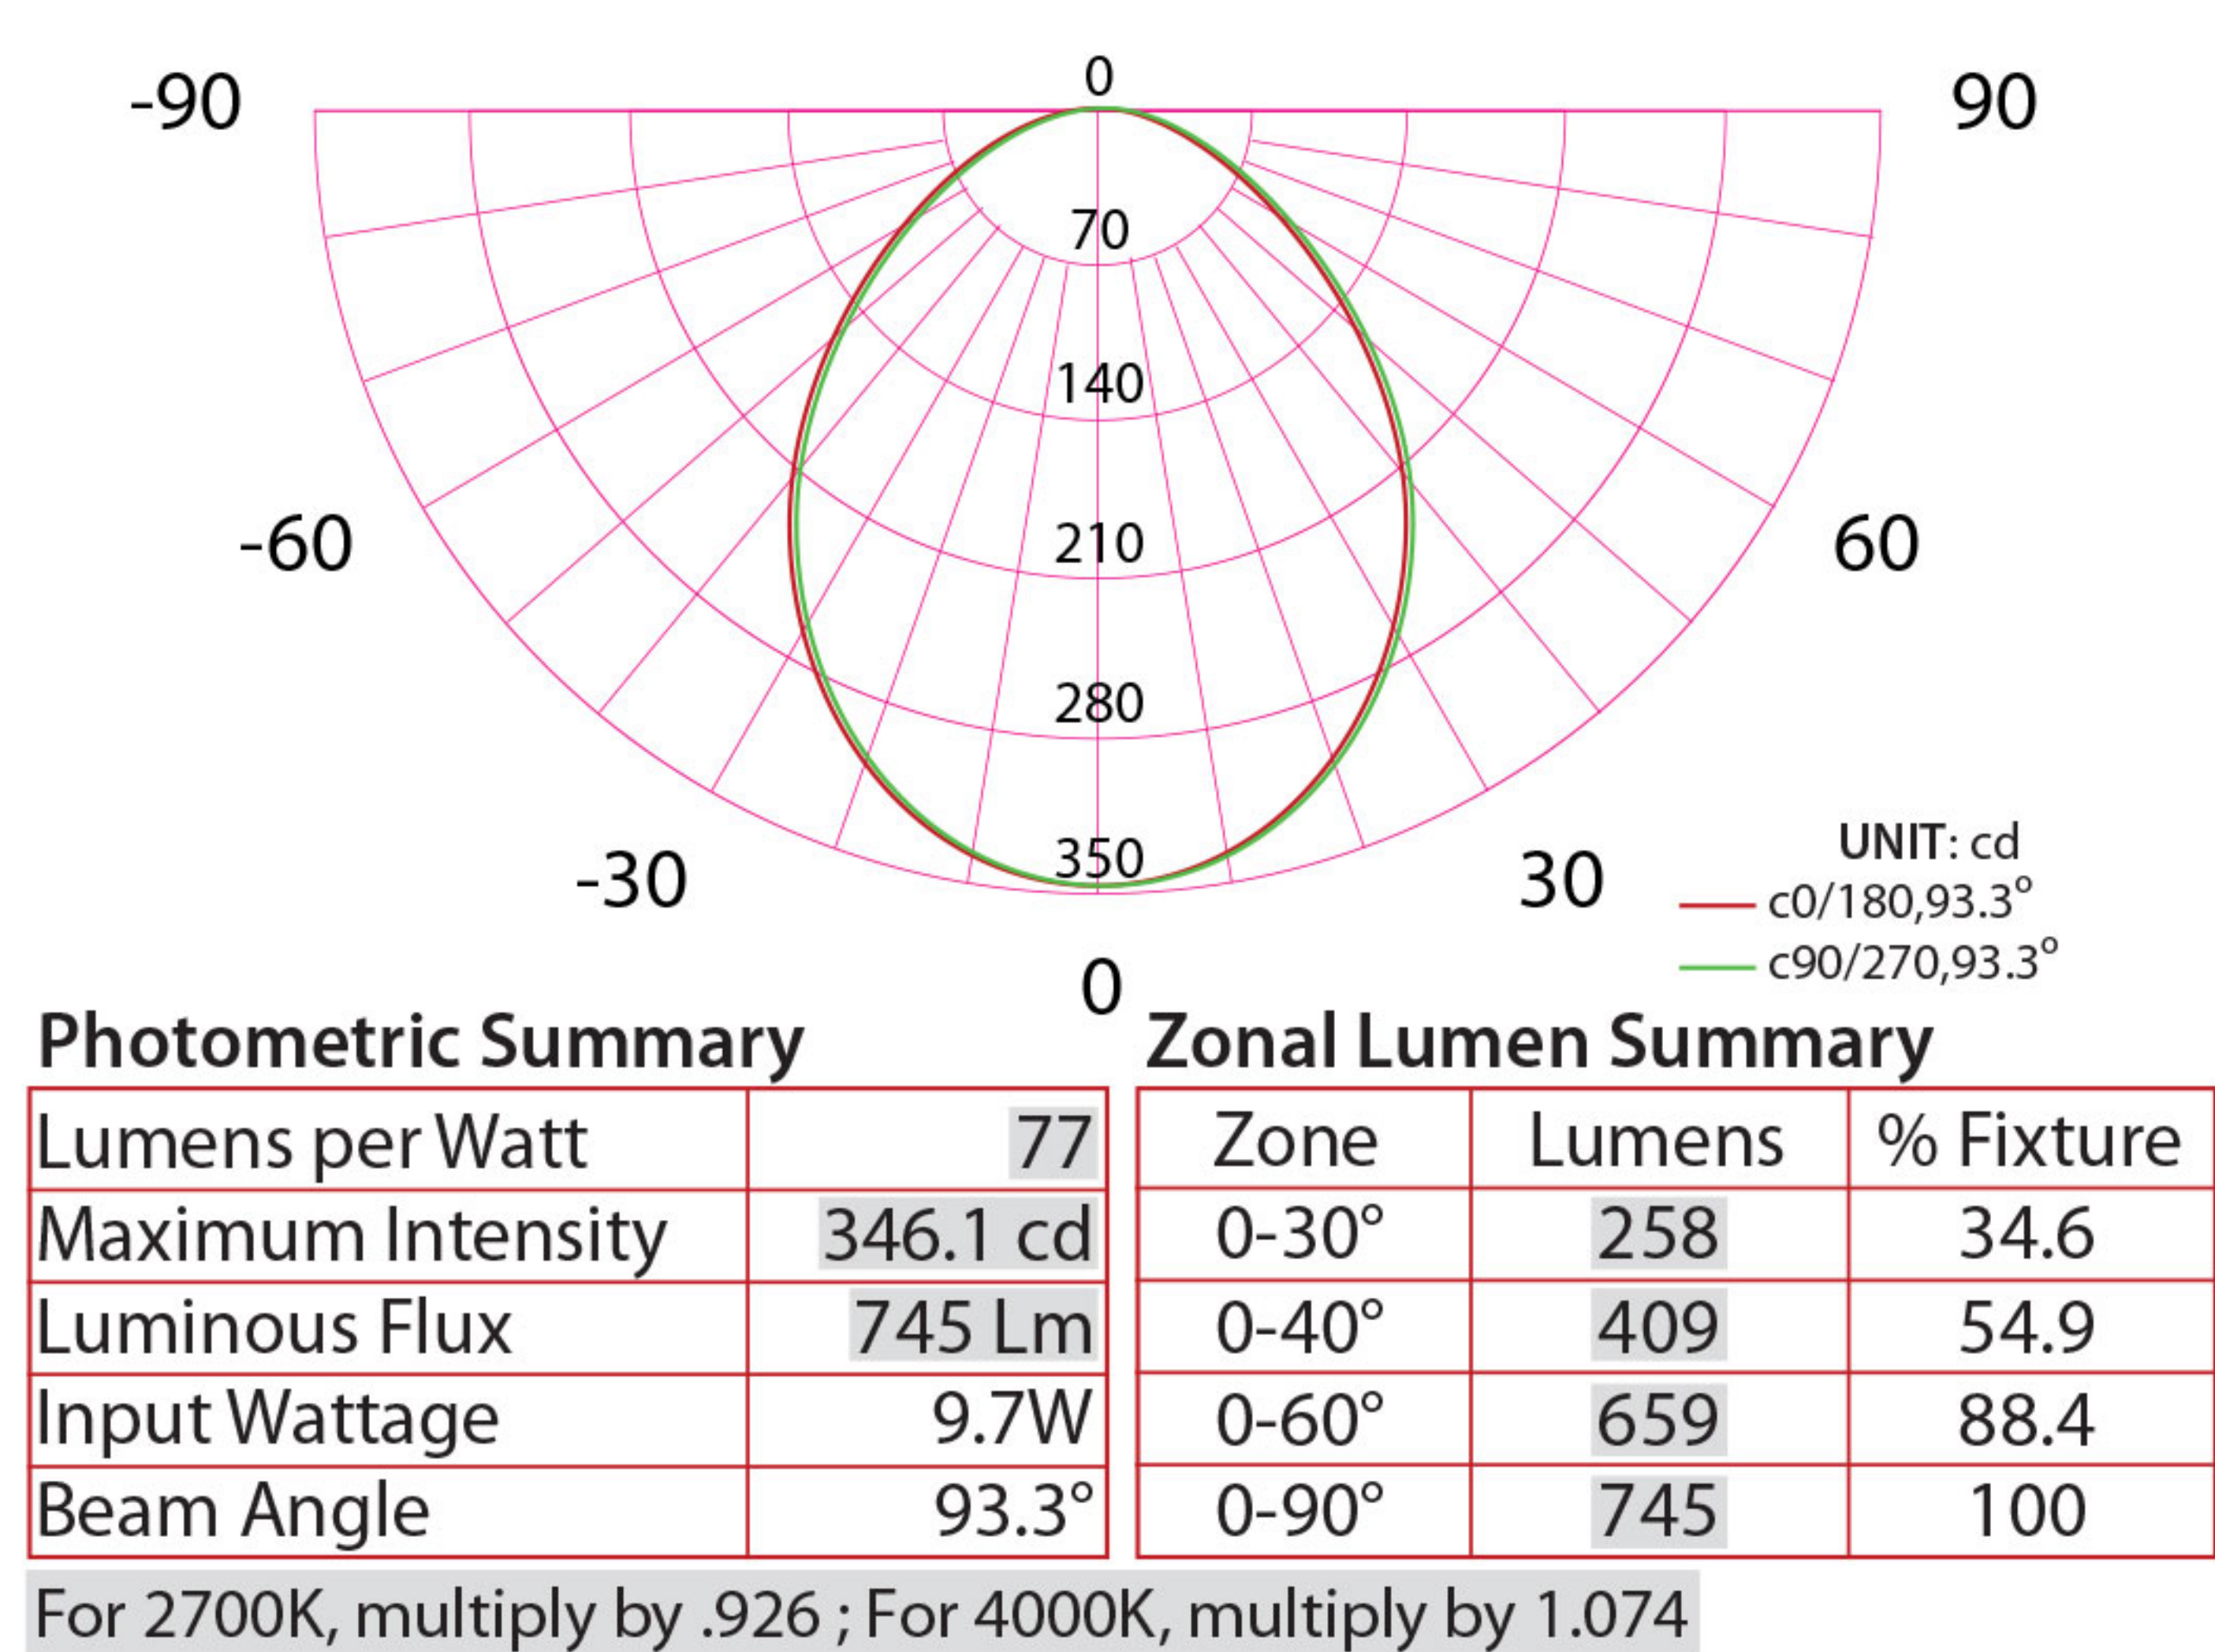

TECHNICAL SPECIFICATIONS

Voltage	120V, 60 Hz AC operation
Construction	SMD LEDs and integrated driver with aluminum back (heat sink)
Mounting	Recessed only
Dimensions	H = 4-3/4", Dia = 7-1/8"
Light ouptut	EP6-E26-40-WH = 800 lumens, EP6-E26-30-WH = 745 lumens, EP6-E26-27-WH = 690 lumens, EP6H-E26-40-WH = 1125 lumens, EP6H-E26-30-WH = 1000 lumens
Wattage	EP6 = 9.7 watts; EP6H = 13 watts
LED specs	Samsung, 35,000 hour rated life; 81-84 CRI; EP6H = 95.5° beam angle; EP6 = 93.3° beam angle
Dimmers	Dimmable with most incandescent, CFL/LED and low voltage electronic dimmers
Diffuser	Frosted polycarbonate lens
Packaging	Retail box, 6 boxes per case

